



P163 THERMO


Thermo Pellet stove with painted steel cladding, top surface in cast iron. Steel structure and boiler, steel and Aluiker firebox, flue gas deflector in steel, cast iron brazier. Standard expansion tank, high-efficiency circulator, cast iron door, handle in painted steel, can be opened with detachable handle.

COLOURS



GENERAL TECHNICAL CHARACTERISTICS

TECHNICAL DRAWING

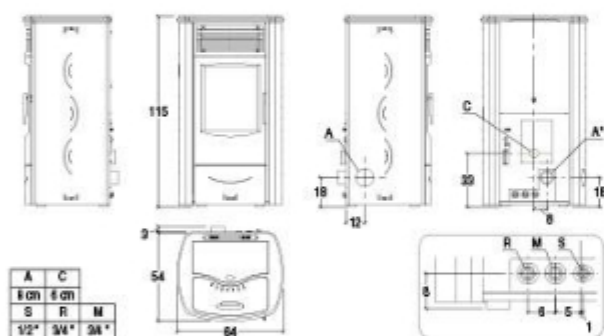

A	C
8 cm	8 cm
S	R
12"	34"
	38"

TECHNICAL DATA

Rated heat output (min-max)	kW	6,6 - 15,6
Heat output to the water (min-max)	kW	5,0 - 12,5
Power adjustable (positions)		16 automatic power levels based on set water temperature
Nominal thermal efficiency (min-max)	%	92,2 - 90,5
Consumption at rated heat output (min-max)	Kg/h	1,5 - 3,5
Dimensions WxDxH	cm	64 x 54 x 115
Cladding/front		
Top		cast iron
Stove		steel
Baffle plate		steel
Firebox		steel - Aluiker®
Brazier		cast iron
Flue outlet Ø	cm	8
Boiler		steel
Circulation pump and safeties		standard
Expansion tank		standard
Sanitary hot water kit		-
Ash drawer		removable
Door		cast iron
Ceramic glass		resistant up to 750°C
Door handle		painted steel, detachable
Hopper capacity		30
Stove control panel		Display with digital controls
Timer-thermostat with programming		daily, weekly and weekend dual time settings
Minimum power consumption	Watt	150
Maximum power consumption	Watt	430
Total weight	Kg	193

The availability of models may vary from Country to Country.